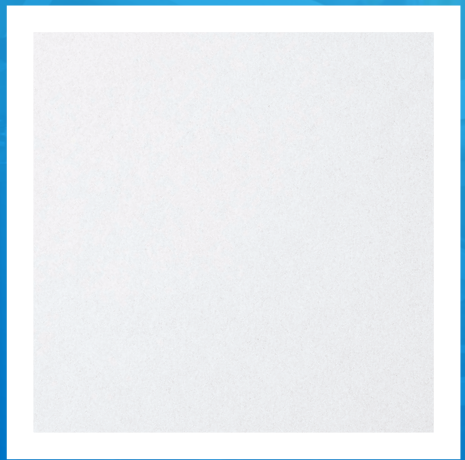
KNAUF CEILING Solutions



ARMSTRONG SANIGUARD



- Armstrong SANIGUARD fulfils all hygienic requirements for healthcare applications and does not contribute to the growth of MRSA. It offers a smooth laminated finish and Class A sound absorption
- Excellent sound absorption (0.95 α_w)
- Good light reflectance (85%)
- ISO 5
- Ideal for healthcare environments with average risk of infection




ISO 9001 ISO 14001

knaufceilingsolutions.com

Armstrong CEILING SOLUTIONS

ARMSTRONG SANIGUARD

KNAUFCEILING Solutions

Edge details Additional edge details on request	Board 	Tegular 24 	Tegular 15/90 
Thickness (mm)	15	15	15
Dimensions (mm) Additional sizes on request	600 x 600 1200 x 600	600 x 600	600 x 600
System	Exposed demountable - System C Exposed - Bandraster, demountable - System I.3 Exposed - Corridor, demountable - System F.3		
Weight	2.5 kg / m²		
Colour	White		
Sound absorption	EN ISO 354 α_w = **0.95** as per EN ISO 11654 - **Class A** Frequency *f* (Hz) | 125 | 250 | 500 | 1000 | 2000 | 4000 α_p | 0.50 | 0.80 | 0.95 | 0.85 | 0.95 | 1.00 NRC = **0.90** as per ASTM C 423		
Sound attenuation	EN ISO 10848-2 $D_{n,f,w}$ = **25 dB** as per EN ISO 717-1		
Fire reaction	Euroclass **A2-s1, d0** as per EN 13501-1	RUS **KM1 (G1, V1, D1, T1)** as per FZ 123	
Light reflectance	**85%**		
Thermal conductivity	λ = **0.040 W/m K** as per EN 12667		
Humidity resistance	**95% RH**		
Clean room	**ISO 5** as per EN ISO 14644-1		
Indoor air quality	A+	E1	
Cleanability			
Sustainability	66%		

Products may vary from country to country. Please contact your local sales representative.
For further information and legal notice, please visit our website.