

TOPIQ® Efficient pro Hygena

$\alpha_w = 1.00$


TOPIQ Efficient pro Hygena offers the same excellent performance as TOPIQ Efficient pro with the added benefit of superior hygiene properties. The surface is washable and anti-microbial (resistant to the growth of germs, bacteria and fungi).



Technical Performance

Sound absorption	EN ISO 354 $\alpha_w = 1.00$ according to EN ISO 11654 NRC = 0.95 according to ASTM C 423
Sound attenuation	$D_{n,f,w} = 25$ dB according EN ISO 10848
Sound attenuation	$R_w = 15$ dB according EN ISO 10140-2:2010
Humidity resistance	up to 100% relative humidity
Building material class	A1 according to EN 13501-1
Light reflection	For white similar to RAL 9010 glare-free approx. 88%
Hygiene	prevents bacteria and fungi
Clean room classification	class 4 according ISO 14644-1
NF S 90-351:2013	zone 4 bacteriological purity class: M1 decontamination class: CP5
Colour	White similar to RAL 9010

Sound absorption values
(TOPIQ® Efficient pro Hygena)

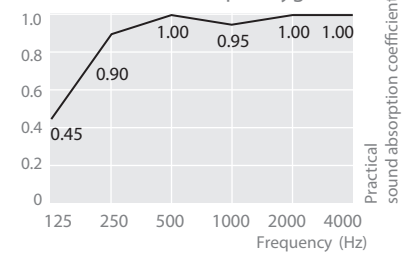

Exposed system, tiles demountable

Recommended module in mm	Thickness/weight TOPIQ® Efficient pro Hygena 20 mm (approx. 2.6 kg/m²)		
	System		
	SK	VT-S 15/24	VT-S 15F
Please note minimum quantities and lead times.			
600 x 600	.	.	.
625 x 625	.	.	.
600 x 1200	.	.	.
625 x 1250	.	.	.